


- Housing: Die-Cast Aluminum, Painted Black
- Blade: Thermoplastic UL 94V-0 P.B.T.
- Insulation Resistance: 100MΩ, 500VDC/min between bare wire and frame
- Dielectric Strength: 1500VAC for one minutue
- Operation Temperature: -10°C~70°C (Humidity 35%-85%RH)
- Storage Temperature: -40°C~85°C (Humidity 35%-85%RH)
- Motor Protection: Impedance Protected
- Weight: 560 g



Specification :

Model Number	Bearing Availability	Rated Voltage (VAC)	Frequency (Hz)	Rated Current (mA)	Power (W)	Speed (RPM)	Air Flow (CFM)	Static Pressure (mm-H2O)	Noise (dBA)
FA1238B11T3-61	2Ball or Sleeve	115	50/60	200/200	14/13	2,100/2,400	79.2/92.4	3.6/4.4	34.5/37.4
FA1238B11T5-61			50/60	250/250	19/17	2,400/2,700	92.4/101.5	6.3/7.1	38.4/41.4
FA1238B11T7-61			50/60	300/300	29/24	2,600/3,000	98.5/112.7	7.5/9.4	39.4/43.3
FA1238B22T3-61		230	50/60	100/100	12/11	2,100/2,400	79.2/92.4	3.6/4.4	34.5/37.4
FA1238B22T5-61			50/60	160/160	16/15	2,400/2,700	92.4/101.5	6.2/7.1	38.4/41.4
FA1238B22T7-61			50/60	200/200	28/24	2,600/3,000	98.5/112.7	7.5/9.4	39.4/43.3

- For Wire lead version, change "T" in the model number to "W".
- For Sleeve Bearing version, change "B" in the model number to "S".

Specifications are subject to change without notice


AC Axial Fan
Standard

Accessories :

Fans are available with a wide range of accessories

Part Type	Wire Form Guard	Plastic Guard	Plastic Filter	Aluminum Filter	Power Cord
Part Number	FGW-120	FGP-120	FPF-120	FFA-120	Any Configuration

Characteristic Curves :

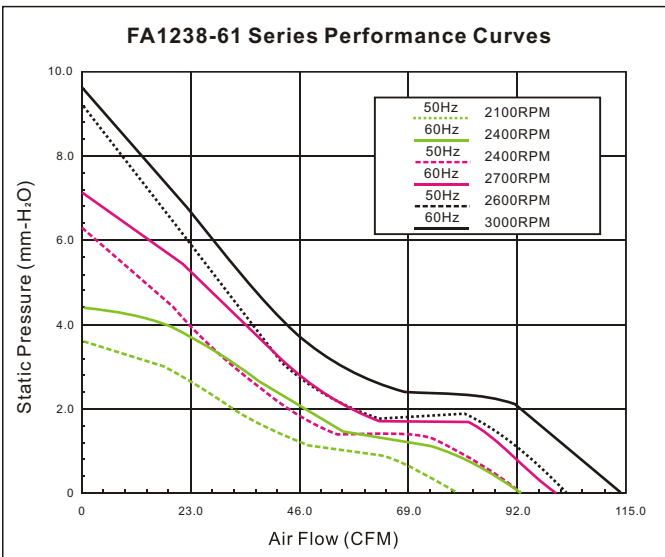

Outline Drawing :

