

- Housing: Die-Cast Aluminum, Painted Black
- Blade: Thermoplastic UL 94V-0 P.B.T.
- Insulation Resistance: 100MΩ, 500VDC/min between bare wire and frame
- Dielectric Strength: 1500VAC for one minutue
- Operation Temperature: -10°C~70°C (Humidity 35%-85%RH)
- Storage Temperature: -40°C~85°C (Humidity 35%-85%RH)
- Motor Protection: Impedance Protected
- Weight: 520 g



Specification :

Model Number	Bearing Availability	Rated Voltage (VAC)	Frequency (Hz)	Rated Current (mA)	Power (W)	Speed (RPM)	Air Flow (CFM)	Static Pressure (mm-H ₂ O)	Noise (dBA)
FA1238B11T3-92	2Ball	115	50/60	120/100	11/9	1,900/2,500	66.0/79.2	2.5/4.7	34.5/39.4
FA1238B11T5-92			50/60	170/130	14/10	2,500/2,800	81.2/91.4	4.7/6.2	38.4/42.4
FA1238B11T7-92			50/60	280/210	25/19	2,600/3,000	85.3/101.5	7.2/8.7	44.3/40.4
FA1238B22T3-92		230	50/60	60/50	12/10	1,900/2,500	66.0/79.2	2.5/4.7	34.5/39.4
FA1238B22T5-92			50/60	90/70	16/11	2,500/2,800	81.2/91.4	4.7/6.2	38.4/42.4
FA1238B22T7-92			50/60	130/90	16/14	2,600/3,000	85.3/101.5	7.2/8.7	44.3/40.4

• For Wire lead version, change "T" in the model number to "W".

Specifications are subject to change without notice




Accessories :

Fans are available with a wide range of accessories

Part Type	Wire Form Guard	Plastic Guard	Plastic Filter	Aluminum Filter	Power Cord
Part Number	FGW-120	FGP-120	FPF-120	FFA-120	Any Configuration

Characteristic Curves :

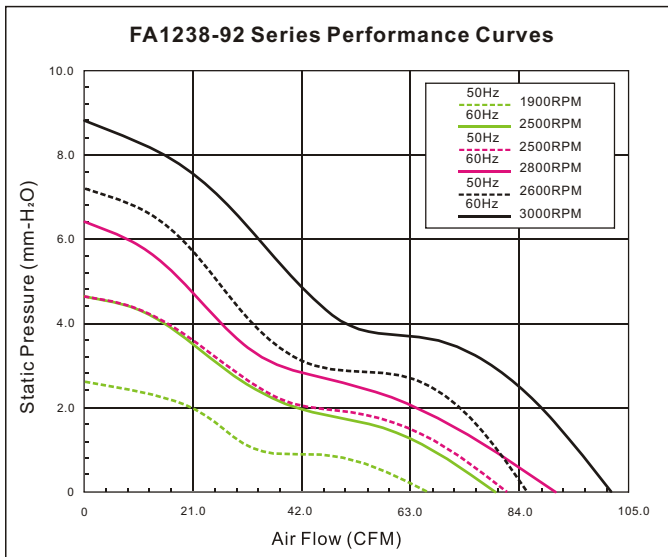

Out line Drawing :

