


- Housing: Die-Cast Aluminum, Painted Black
- Blade: Thermoplastic UL 94V-0 P.B.T.
- Insulation Resistance: 100MΩ, 500VDC/min between bare wire and frame
- Dielectric Strength: 1500VAC for one minutue
- Operation Temperature: -10°C~70°C (Humidity 35%-85%RH)
- Storage Temperature: -40°C~85°C (Humidity 35%-85%RH)
- Motor Protection: Impedance Protected
- Weight: 500 g



Specification :

Model Number	Bearing Availability	Rated Voltage (VAC)	Frequency (Hz)	Rated Current (mA)	Power (W)	Speed (RPM)	Air Flow (CFM)	Static Pressure (mm-H ₂ O)	Noise (dBA)
FA1238B11T7-97	2Ball or Sleeve	115	50/60	280/230	22/18	2,500/2,600	104.5/109.6	7.6/9.1	47.3/51.2
FA1238B22T7-97		230	50/60	160/130	24/20	2,400/2,500	104.5/109.6	7.6/9.1	47.3/51.2

• For Wire lead version, change "T" in the model number to "W".
 • For Sleeve Bearing version, change "B" in the model number to "S".
 Specifications are subject to change without notice


AC Axial Fan
Standard

Accessories :

Fans are available with a wide range of accessories

Part Type	Wire Form Guard	Plastic Guard	Plastic Filter	Aluminum Filter	Power Cord
Part Number	FGW-120	FGP-120	FPF-120	FFA-120	Any Configuration

Characteristic Curves :

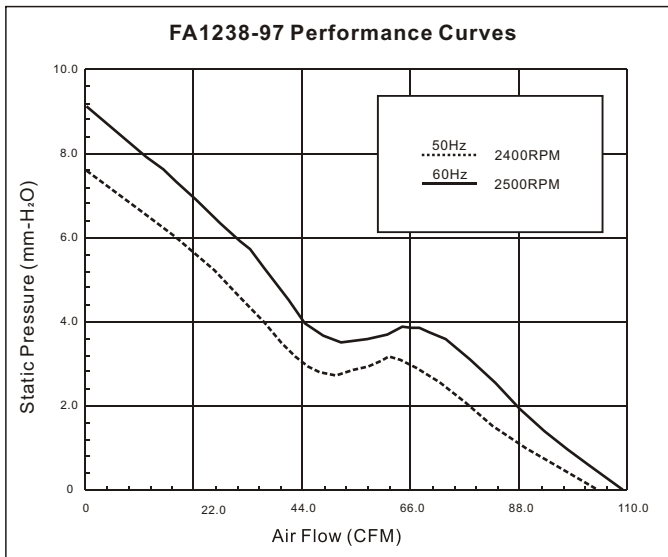

Out line Drawing :

