


- Housing/Blade: Plastic UL 94V-0 P.B.T.
- Insulation Resistance: 10MΩ, 500VDC/min between bare wire and frame
- Dielectric Strength: 5mA max. 500VAC/min between bare wire and frame
- Operation Temperature: -20°C~70°C (Humidity 15%-90%RH)
- Storage Temperature: -40°C~85°C (Humidity 15%-90%RH)
- Lead Wire: UL Type #24 AWG
- Weight: 44 g



Specification :

Model Number	Bearing Availability	Rated Voltage (VDC)	Operating Voltage (VDC)	Actual Current (mA)	Power (W)	Speed (R.P.M)	Air Flow (CFM)	Static Pressure (mm-H ₂ O)	Noise (dBA)	Additional Function (See page 4)	
FD6025B05W3-81	※	5	4.0~5.5	280	1.40	3,400	22.10	3.50	30.80	P,M,U,X	
FD6025B05W5-81	★※		4.0~5.5	250	1.25	4,200	23.90	4.90	35.20	P,M,U,X	
FD6025B05W7-81	★※		4.0~5.5	520	2.60	5,000	29.80	6.80	39.40	P,M,U,X	
FD6025B12W01-81	(★)※	12	8.0~13.8	30	0.36	1,000	7.10	0.30	7.00	P,M,U,X,Y	
FD6025B12W00-81	(★)※		8.0~13.8	50	0.60	1,800	8.70	0.90	19.40	P,M,U,X,Y	
FD6025B12W1-81	※		6.0~13.8	70	0.84	2,600	15.70	2.00	23.90	P,M,U,X,Y	
FD6025B12W3-81	※		6.0~13.8	130	1.56	3,400	22.10	3.50	30.80	P,M,U,X,Y	
FD6025B12W5-81	※		6.0~13.8	180	2.16	4,200	23.90	4.90	35.20	P,M,U,X,Y	
FD6025B12W7-81	★※		6.0~13.8	210	2.52	5,000	29.80	6.80	39.40	P,M,U,X	
FD6025B12W9-81	★※		6.0~13.8	380	4.56	5,800	34.60	8.80	43.50	P,M,U,X	
FD6025B12W11-81	★※		6.0~13.8	520	6.24	6,600	39.60	11.30	47.80	P,M,U,X	
FD6025B24W00-81	(★)		24	18.0~27.6	30	0.72	1,800	8.70	0.90	19.40	P,M,U,X,Y
FD6025B24W1-81	(★)			12.0~27.6	50	1.20	2,600	15.70	2.00	23.90	P,M,U,X,Y
FD6025B24W3-81	(★)			12.0~27.6	70	1.68	3,400	22.10	3.50	30.80	P,M,U,X,Y
FD6025B24W5-81	(★)			12.0~27.6	140	3.36	4,200	23.90	4.90	35.20	P,M,U,X
FD6025B24W7-81	★	12.0~27.6		160	3.84	5,000	29.80	6.80	39.40	P,M,U,X	
FD6025B24W9-81	★	12.0~27.6		210	5.04	5,800	34.60	8.80	43.50	P,M,U,X	
FD6025B24W11-81	★	12.0~27.6		260	6.24	6,600	39.60	11.30	47.80	P,M,U,X	
FD6025B48W00-81	★	48		38.0~52.8	30	1.44	1,800	8.70	0.90	19.40	P,M,U,X
FD6025B48W1-81	★			38.0~52.8	30	1.44	2,600	15.70	2.00	23.90	P,M,U,X
FD6025B48W3-81	★			38.0~52.8	60	2.88	3,400	22.10	3.50	30.80	P,M,U,X
FD6025B48W5-81	★			38.0~52.8	70	3.36	4,200	23.90	4.90	35.20	P,M,U,X
FD6025B48W7-81	★			38.0~52.8	90	4.32	5,000	29.80	6.80	39.40	P,M,U,X
FD6025B48W9-81	★		38.0~52.8	110	5.28	5,800	34.60	8.80	43.50	P,M,U,X	
FD6025B48W11-81	★		38.0~52.8	160	7.68	6,600	39.60	11.30	47.80	P,M,U,X	

- For "Long Life", "Sleeve" Bearing Version, change "B" in the model number to "L", "S".
- If model with "★", auto restart protection built in; If model with "(★)", auto restart protection is optional.
- If model with "※", the safety is pending.
- For additional function availability type, please refer to the notes of page 4.


Specifications are subject to change without notice

Accessories :

Fans are available with a wide range of accessories

Part Type	Wire Form Guard	Plastic Guard	Plastic Filter	Aluminum Filter
Part Number	FGW-060	FGP-060	FPF-060	FFA-060

Characteristic Curves :

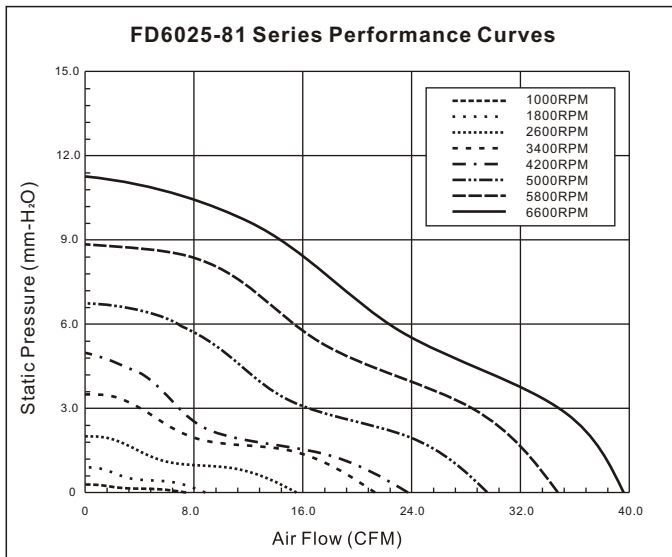

Out line Drawing :

