

- Housing/Blade: Plastic UL 94V-0 P.B.T.
- Insulation Resistance: 10MΩ, 500VDC/min between bare wire and frame
- Dielectric Strength: 5mA max. 500VAC/min between bare wire and frame
- Operation Temperature: -10°C~70°C (Humidity 35%-85%RH)
- Storage Temperature: -40°C~70°C (Humidity 35%-85%RH)
- Lead Wire: UL Type #26 AWG
- Weight: 69 g



Specification :

Model Number	Bearing Availability	Rated Voltage (VDC)	Operating Voltage (VDC)	Actual Current (mA)	Power (W)	Speed (R.P.M)	Air Flow (CFM)	Static Pressure (mm-H ₂ O)	Noise (dBA)	Additional Function (See page 4)
FD8025B05W3-71	B,C,L,S	5	4.0~5.5	220	1.10	2,000	25.80	1.60	22.10	P,M
FD8025B05W5-71	B,C,L,S		4.0~5.5	380	1.90	2,500	32.40	2.40	26.20	P,M
FD8025B05W7-71	B,C,L,S		4.0~5.5	400	2.00	3,000	38.50	3.40	30.90	P,M
FD8025B12W3-71	B,C,L,S	12	10.8~13.2	90	1.08	2,000	25.80	1.60	22.10	P,M
FD8025B12W5-71	B,C,L,S		10.8~13.2	120	1.44	2,500	32.40	2.40	26.20	P,M
FD8025B12W7-71	B,C,L,S		10.8~13.2	170	2.04	3,000	38.50	3.40	30.90	P,M
FD8025B24W3-71	B,C,L,S	24	17.0~28.0	90	2.16	2,000	25.80	1.60	22.10	P,M
FD8025B24W5-71	B,C,L,S		17.0~28.0	120	2.88	2,500	32.40	2.40	26.20	P,M
FD8025B24W7-71	B,C,L,S		17.0~28.0	150	3.60	3,000	38.50	3.40	30.90	P,M

• For "One Ball & One Sleeve", "Long Life", "Sleeve" Bearing Version, change "B" in the model number to "C", "L", "S".
 • For additional function availability type, please refer to the notes of page 4.


Specifications are subject to change without notice

Accessories :

Fans are available with a wide range of accessories

Part Type	Wire Form Guard	Plastic Guard	Plastic Filter	Aluminum Filter
Part Number	FGW-080	FGP-080	FPF-080	FFA-080

Characteristic Curves :

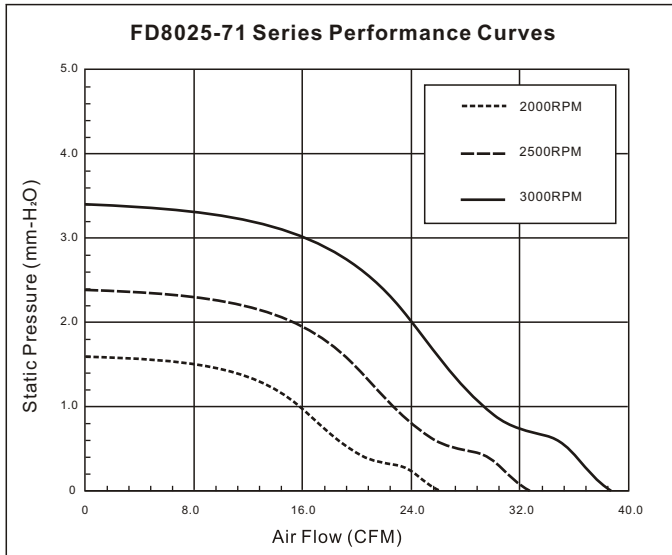

Out line Drawing :

