

**Standards and Specifications**  
of  
**Model: FD8025B12W3-68-2NY** (Preliminary Version)  
(with IP55)

**A. General Specification**

Item	Specification / Standard / Condition	
Outline Dimension	80 mm x 80 mm x 25 mm	
Bearing	Dual Ball Bearing.	
Rated Voltage	DC 12V	
Operating Voltage	DC 8.00V ~ DC 13.80V	
Starting Voltage	DC 6.00V	1. Rated Voltage 2. 25°C, 65% RH
Rated Current	0.08A	
Power Consumption	0.96W (Max.1.56W)	
Speed	1500R.P.M.	1. Free Air 2. Rated Voltage 3. 25°C, 65% RH 4. Tolerance: ± 10%
Maximum Airflow	18.80CFM	1. Rated Voltage 2. AMCA Standard 3. Rated Current
Maximum Static Pressure	0.91 mm-H <sub>2</sub> O	
Noise Level	15.10 dB (A)	1. Rated Voltage 2. Measured in a Non-Echo Chamber 3. CNS 8753 Standard 4. ISO 3744 Test Condition
Life	60,000 hrs	40°C, L10 at Conf. Level 90%, Rated Voltage
Net Weight	68g	
Number of Blade	7 Blades	
Number of Pole	4 Poles	
Rotating Direction	Counter-Clockwise	
Plastic Material: Blade, Housing, Bobbin	1. UL 94V-0 2. P.B.T. + 30% GF Black	
Lead Wire	UL 1007, 26AWG	Red: (+) Black: (-)
Connector	With AMP Connector	

**B. Electrical Specification**

Item	Specification / Condition
Locked Rotor Protection	No damage done for a continuous 72 hours rotation lock at rated voltage.
Polarity Protection	Circuit is protected when V <sub>CC</sub> & GND are exchanged.
Insulation Resistance	10m.Ohm / between unshielded wire and frame at 500 VDC/min.
Dielectric Strength	5 mA Maximum. / Measured between lead wire + and frame at 500 VAC/min.

**C. Environmental Specification**


Item	Specification / Condition
Operating Condition	Temperature: -10°C ~ + 65°C Humidity: 35% ~ 85% RH
Storage Temperature	Temperature: -40°C ~ +70°C Humidity: 35% ~ 85% RH
Humidity	Per MIL-STD-202F Method 103B Life: 96 hours Temperature: +40 ± 2°C
Thermal Shock	Per MIL-STD-202F Method 107D, Condition D
Packing Vibration Test	Packing condition: X, Y, Z 3 directions, 1.1G load vibration test for 30 min.
Packing Shock Proof Test	1 corner, 3 edges, 6 faces natural drop from 60cm high, packed

**D. Safety Approvals**




Safety Approval	File No.
UL	E194726
CUL	E194726
TUV	R50048194

**E. Label Marking**



(1)	Model Number
(2)	Rated Voltage
(3)	Power Consumption
(4)	Bearing Type
(5)	Location

**F. Air Flow Performance Curve**

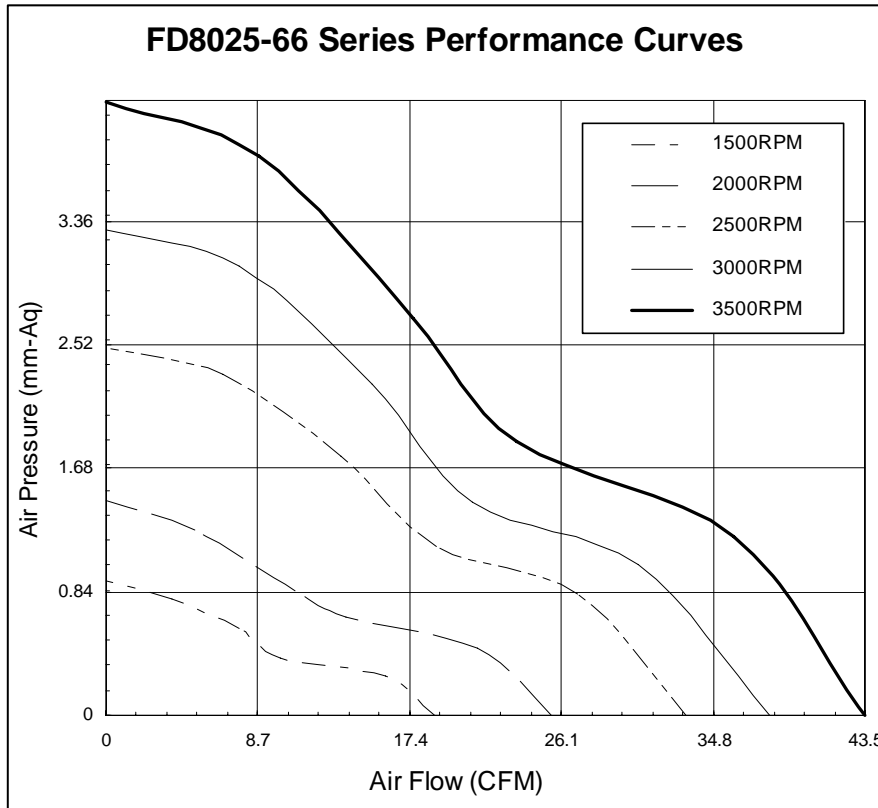

**G. Model Drawing**

