


- Housing/Blade: Plastic UL 94V-0 P.B.T.
- Insulation Resistance: 10MΩ, 500VDC/min between bare wire and frame
- Dielectric Strength: 5mA max. 500VAC/min between bare wire and frame
- Operation Temperature: -10°C~70°C (Humidity 35%-85%RH)
- Storage Temperature: -40°C~70°C (Humidity 35%-85%RH)
- Lead Wire: UL Type #26 AWG
- Weight: 83 g



Specification :

Model Number	Bearing Availability	Rated Voltage (VDC)	Operating Voltage (VDC)	Actual Current (mA)	Power (W)	Speed (R.P.M)	Air Flow (CFM)	Static Pressure (mm-H ₂ O)	Noise (dBA)	Additional Function (See page4)
FD9225B12W2-71	B,C,L,S	12	10.8~13.2	130	1.56	2,000	41.10	1.80	25.10	P,M
FD9225B12W3-71	B,C,L,S		10.8~13.2	190	2.28	2,300	47.20	2.30	27.80	P,M
FD9225B12W4-71	B,C,L,S		10.8~13.2	230	2.76	2,600	53.30	2.90	30.90	P,M
FD9225B24W2-71 ※	B,C,L,S	24	17.0~28.0	150	3.60	2,000	41.10	1.80	25.10	P,M
FD9225B24W3-71 ※	B,C,L,S		17.0~28.0	180	4.32	2,300	47.20	2.30	27.80	P,M
FD9225B24W4-71 ※	B,C,L,S		17.0~28.0	220	5.28	2,600	53.30	2.90	30.90	P,M


- For "One Ball & One Sleeve", "Long Life", "Sleeve" Bearing Version, change "B" in the model number to "C", "L", "S".
 - If model with "※", the safety is pending.
 - For additional function availability type, please refer to the notes of page 4.
- Specifications are subject to change without notice

Accessories :

Fans are available with a wide range of accessories

Part Type	Wire Form Guard	Plastic Guard	Plastic Filter	Aluminum Filter
Part Number	FGW-090	FGP-090	FPF-090	FFA-090

Characteristic Curves :

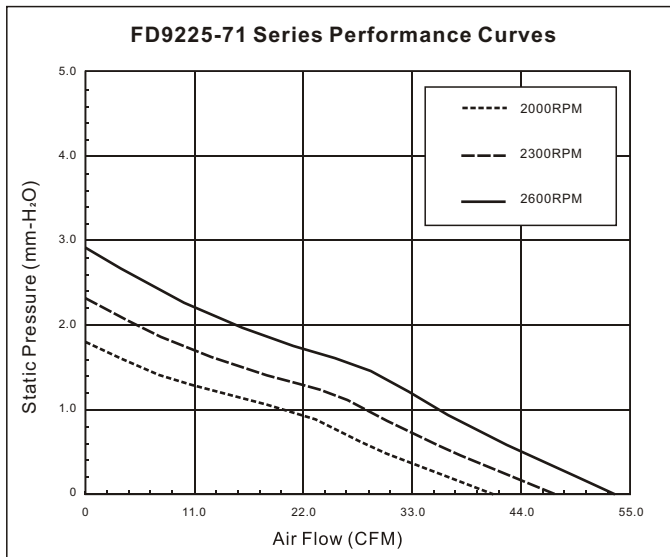

Out line Drawing :

